

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 March 2001 (22.03.2001)


(10) International Publication Number
WO 01/20817 A1

PCT

- (51) International Patent Classification⁷: **H04B 7/26** (74) Agents: **WADSWORTH, Philip, R. et al.**; Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (21) International Application Number: **PCT/US00/24956**
- (22) International Filing Date:
12 September 2000 (12.09.2000)
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/395,300 13 September 1999 (13.09.1999) **US**
- (71) Applicant: **QUALCOMM INCORPORATED [US/US];**
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventor: **TIEDEMANN, Edward, G., Jr.**; 4350 Bromfield Avenue, San Diego, CA 92122 (US).
- Published:
— *With international search report.*

[Continued on next page]

(54) Title: **METHOD AND APPARATUS FOR OVERLAYING TWO CDMA SYSTEMS ON THE SAME FREQUENCY BANDWIDTH**

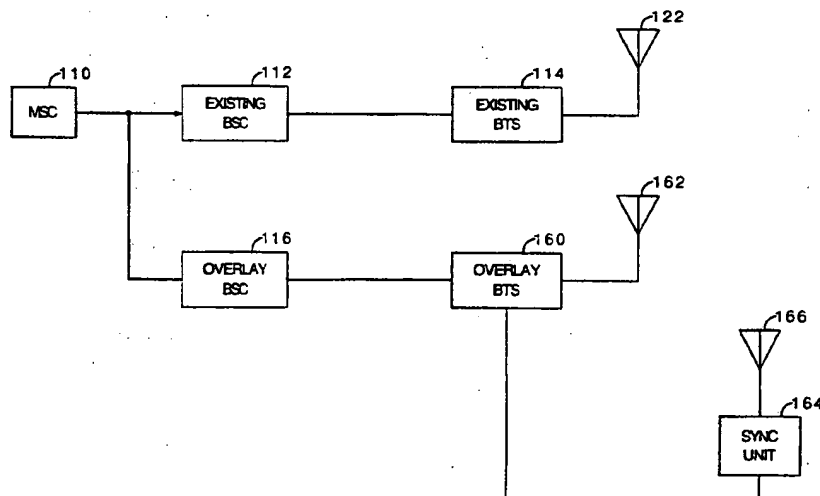

(57) Abstract: In order to align the timing of an overlay base station to the timing of an existing base station, a sync unit (128) is introduced into the system. The sync unit (128) has a first receiver configured to receive a first signal, the first signal having a first CDMA channelization. The first receiver is configured to produce an indication of a timing of the first signal. The sync unit (128) also has a second receiver configured to receive a second signal, the second signal having a second CDMA channelization. The second receiver is configured to produce an indication of a timing of the second signal. The sync unit (128) also has a time error detection unit configured to compare the timing of the first signal and the timing of the second signal to determine a relative timing offset thereof.

WO 01/20817 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD AND APPARATUS FOR OVERLAYING TWO CDMA SYSTEMS ON THE SAME FREQUENCY BANDWIDTH

5 BACKGROUND OF THE INVENTION

I. Field of the Invention

The invention relates to communication systems. In particular, the invention relates to overlaying code division multiple access communication systems.

10

II. Description of the Related Art

The wireless medium is becoming one of the predominate means by which voice information and digital data are transferred in modern society. In wireless communication systems, it is common that a single base station transmits signals to a plurality of remote units. In order to combat the harsh multipath wireless transmission channel while providing signaling to a plurality of remote units, modulation and coding schemes which provide efficient data transfer, as well as user channelization, have been developed. In general, these schemes operate most efficiently when each signal from a base station is transmitted with synchronized timing. For example, in a typical code division multiple access (CDMA) system, the signals are distinguished from one another through the use of different codes. In the case of transmissions from a base station to a remote unit, these codes are typically an orthogonal set of codes such as, for example, Walsh functions. If the transmissions corresponding to one orthogonal channel become misaligned with the transmissions corresponding to another channel, the orthogonal nature of the codes is degraded and the transmissions may significantly interfere with one another.

Figure 1 is an exemplifying embodiment of a terrestrial wireless communication system 10. Figure 1 shows three remote units 12A, 12B and 12C and two base stations 14. In reality, typical wireless communication

30

systems may have many more remote units and base stations. In Figure 1, the remote unit 12A is shown as a mobile telephone unit installed in a car. Figure 1 also shows the portable computer remote unit 12B and the fixed location remote unit 12C such as might be found in a wireless local loop or meter reading system. In the most general embodiment, the remote units may be any type of communication unit. For example, the remote units can be hand-held portable units, portable data units such as a personal data assistant, or fixed location data units such as meter reading equipment. Figure 1 shows a forward link signal 18 from the base stations 14 to the remote units 12 and a reverse link signal 20 from the remote units 12 to the base stations 14.

In the discussion that follows, to aid in illustration, the invention is described with reference to a commonly known, wireless link industry standard. In fact, the generic principles of the invention can be directly applied to many multiple access communication systems. The discussion that follows assumes operation in accordance with the system described in TIA/EIA/IS-95-A and its progeny, the contents of which are incorporated herein by reference, published by the Telephone Industry Association entitled "Mobile Station-Base Station Compatibility Standard for Dual-Mode Wideband Spread Spectrum Cellular System" commonly referred to as IS-95.

In a typical wireless communication system, such as that illustrated in Figure 1, some base stations have multiple sectors. A multi-sectored base station comprises multiple independent transmit and receive antennas as well as independent processing circuitry. The principles discussed herein apply equally to each sector of a multi-sectored base station and to a single sectored independent base station. For the remainder of this description, therefore, the term "base station" can be assumed to refer to either a sector of a multi-sectored base station or a single sectored base station.

In systems using IS-95, remote units use a common frequency bandwidth for communication with all base stations in the system. Use of a common frequency bandwidth adds flexibility and provides many advantages to the system. For example, use of a common frequency

bandwidth enables a remote unit to simultaneously receive communication signals from more than one base station, as well as transmit a single signal for reception by more than one base station. The remote unit discriminates between the simultaneously received signals from the various base stations through the use of the spread spectrum CDMA waveform properties.

In a wireless system, maximizing the capacity of the system in terms of the number of simultaneous calls that can be handled is extremely important. If a minimum acceptable signal quality is specified, an upper bound on the number of simultaneous users which can communicate through a base station can be calculated. With some simplifications, the amount of power that a remote unit must transmit is given by Equation 1:

$$P = \frac{RN_0 \left(\frac{E_b}{N_t} \right)_{req}}{1 - \frac{R}{W} (N-1) \left(\frac{E_b}{N_t} \right)_{req} - \alpha \frac{R}{W} \left(\frac{E_b}{N_t} \right)_{req}}$$

Eq. 1

wherein:

15 N is the number of remote units operating within a common coverage area;

R is the average data rate, which is assumed the same for all remote units;

W is the spreading rate;

20 N_0 is the thermal noise floor of the base station plus interference from non-power controlled sources;

$\left(\frac{E_b}{N_t} \right)_{req}$ is the required energy per noise spectral density for a remote

unit, which is assumed equal for each remote unit; and

α is the interference coupling coefficient from all other coverage areas.

25 The upper bound on the number of simultaneous users is commonly referred to as the pole capacity of a system and is given when the denominator of Equation 1 is equal to zero. The ratio of the actual number of users to the pole

capacity is defined as the loading of the system. As the number of actual users approaches the pole capacity, loading approaches unity. A loading close to unity implies potentially unstable behavior of the system. Unstable behavior can lead to degraded performance in terms of voice quality, high error rates, failed handoffs and dropped calls. In addition, as loading increases, the required output power of the remote unit increases. Because the output power of the remote unit is limited, the size of the coverage area of the base station shrinks such that users on the outer edge of the no-load coverage area are no longer be able to transmit sufficient power to communicate with the base station at an acceptable signal quality when the base station becomes heavily loaded. Equation 1 is specifically for the reverse link. However, there is a comparable equation for the forward link with comparable effects. For the forward link, as the loading increases, the required output power of the base station increases.

For these reasons, it is advantageous to limit the number of users which access the system such that loading does not exceed a specified percentage of the pole capacity. One way to limit the loading of the system is to deny access to the system once the loading of the system has reached a predetermined level. For example, if the loading increases above 70% of the pole capacity, it is advantageous to deny requests for additional connection originations and to refrain from accepting hand-off of existing connections.

When two CDMA systems are operated within a common bandwidth, these same issues of loading as well as time and phase synchronization are still important. If the two systems are overlaid without paying attention to their underlying properties, resulting capacity can be quite low. This is particularly true for the forward link where the signals radiated by the base station are typically orthogonal. For example, the forward link wave forms described in the above-referenced IS-95 are orthogonal to one another. If the overlaid signal set is not orthogonal to the existing signal set, then the capacity reduction can be quite large. In order to maintain orthogonality, the two systems must be time synchronized with

one another. In addition, the capacity of the two systems is also related in that the loading on the first system acts as interference to the second, thereby decreasing the capacity of the second system, and the loading on the second system acts as interference to the first, thereby decreasing the capacity of the first system.

Use of a pilot signal improves the capacity on the forward link. The pilot signal is used for acquisition and channel estimation such as, for example, timing, phase, power control, and received symbol weighting. The other signals transmitted by the base station have a known and constant phase alignment with respect to the pilot signal. To avoid transmitting multiple pilot signals, it is preferable to maintain the constant phase alignment with respect to the overlaid channels.

When deploying a second CDMA system in the presence of an existing system, the existing system is not typically configured with the capability of interfacing with a second type of system. Therefore, the existing system does not typically provide the outputs or accept the inputs which are required to achieve synchronization and co-ordinate loading between the two systems. In contrast, the new system can be designed with such an overlay configuration in mind. In order to reduce the cost of deploying a second overlay system, it is important to avoid modification of the existing system.

Therefore, there is a need in the art for a system and method for overlaying two CDMA systems on the same frequency bandwidth.

25

SUMMARY OF THE INVENTION

In order to overlay a second CDMA system over an existing system, the timing of the signals transmitted by each system needs to be aligned. In order to avoid modifying the existing system, a sync unit is used to receive signals from the first and second systems. By comparing the timing of the signals, an error signal indicative of a timing offset is generated. The timing error signal is coupled to the second CDMA system and is used to adjust the

30

timing of the second system in order to reduce the timing difference between the two systems. In some cases, the phase of the two systems is aligned in a similar manner.

When a second CDMA system overlays an existing system, the capacity of each system is limited by the loading on the other system. In one embodiment, the sync unit also measures the power of a set of signals transmitted by both systems and determines therefrom a level of loading.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of an exemplifying terrestrial wireless communication system.

Figure 2 is a frequency domain spectral plot showing the spectral characteristics of a cdma2000 system and an IS-95 system.

Figure 3 is a block diagram showing a basic structure which can be used to implement the invention.

Figure 4 is a block diagram of the sync unit of the invention.

Figure 5 is a block diagram of a cellular system in which the overlay system utilizes an auxiliary pilot channel.

Figure 6 is a representative drawing showing the use of a directional, spot antenna.

Figure 7 is a flowchart illustrating phase synchronization according to the invention.

Figure 8 is a flowchart showing load control according to the invention.

DETAILED DESCRIPTION OF THE INVENTION

When a third generation, broadband, code divisional multiple access (CDMA) system is deployed in a service area previously providing an earlier generation of a CDMA system, it is often advantageous to overlay the operating spectrum of the broadband system with the existing system. For

example, a cdma2000 system using an 1X mode spreading rate of 1.2288 Mcps (a bandwidth of approximately 1.25 MHz) can be overlaid in an older generation IS-95 system which also uses a spreading rate of 1.2288 Mcps (a bandwidth of approximately 1.25 MHz). The cdma2000 system also has a 3X mode which uses a spreading rate of 3×1.2288 Mcps (a bandwidth of approximately 3.75 MHz). One of the cdma2000 3X modes has a multicarrier forward link which can overlay an older generation IS-95 system or a cdma2000 1X system.

Figure 2 is a spectral plot showing the spectral characteristics of the forward links for the cdma2000 system and the IS-95 system. Spectrum 100 represents one channel of the cdma2000 system operating in 3X mode and spectrums 102, 104 and 106 represent the spectrum for 3 IS-95 or cdma2000 1X mode channels. Spectrums 102, 104, and 106 also represent each carrier of the cdma2000 3X multi-carrier system. In order for such an overlay system to operate properly, both systems operate with a common timing so that the systems do not cause excessive interference to one another. If a common pilot channel is used, the two systems transmit their forward link code channels using a common phase which is aligned to a common forward link pilot channel phase. In addition, because these systems share the same bandwidth, the combined loading of both systems together must remain below an operating threshold in order to maintain system stability.

Figure 3 is a block diagram showing a basic structure which can be used to implement the invention. A mobile switching center (MSC) 110 couples the cellular system to the public switch telephone network (PSTN). The MSC 110 is coupled to one or more base station controllers (BSC) 112 for the existing system. The BSC 112 provides control for a set of base stations such as the base station transceiver subsystem (BTS) 114. The BSC 112 provides control functions such as distribution of forward link signals to the base station transceiver subsystems as well as signal combination for reverse link signals received from the base station transceiver subsystems. The base station transceiver subsystems such as BTS 114 are typically scattered

throughout the coverage area of the system in order to provide service to a corresponding base station coverage area. The BTS 114 provides the encoding and modulation as well as other features of the physical link in order to create the radio frequency (RF) signal for transmission over the wireless link for an existing system, such as an IS-95 system or cdma2000 system operating in 1X or 3X mode. The base station transceiver subsystem is typically coupled directly to an antenna, set of diversity antennas, or antenna array such as the antenna 122 shown in Figure 3.

In addition to the existing system, Figure 3 also shows an overlay system. Although alternative implementations can be developed, in Figure 3, the overlay system operates under the control of the MSC 110. The MSC 110 is coupled to an overlay base station controller 116 which provides control of a set of overlay base station receivers such as an overlay BTS 118 shown in Figure 3. In the example Figure 3, the overlaid BSC 116 and the existing BSC 112 are connected to the same MSC 110. However, each the existing and overlaid BSCs can be connected to different MSCs. The overlay BTS 118 creates and receives wireless link signaling according to a second CDMA protocol such as an IS-95 system or cdma2000 system operating in 1X or 3X mode.

In order to maintain a common phase and timing, the signals transmitted from each system can be transmitted through a common antenna. Therefore, a combiner 120 couples the existing BTS 114 and the overlay BTS 118 to the antenna 122. As shown in Figure 3, the combiner 120 combines the output of the power amplifiers (not shown) of the exiting BTS 114 and the overlay BTS 118. However, generally, the combiner 120 can be implemented at one of many stages within the transmit chain. For example, in one embodiment, the combiner operates at an intermediate frequency, at analog baseband or at digital baseband.

Likewise, in the configuration shown in Figure 3, the combiner 120 couples the antenna 122 to a low noise amplifier (not shown) within the existing BTS 114 and the overlay BTS 118. However, in alternative

embodiments the combiner may be connected at other points within the receive chain. In yet another embodiment, the receive path of the existing base station 114 and the overlay base station 118 are independent of one another. For example, Figure 3 shows the transmit and receive portions of the existing and overlay BTSs combined. However, the transmit and receive sections may be separate and may use different antennas.

The introduction of the overlay system is facilitated by a sync unit 128. In one embodiment, the sync unit 128 is coupled to an independent antenna 126 which is positioned within the coverage area of the antenna 122. In another embodiment, the sync unit obtains signal energy used to extract timing, signal phase, and loading, by using a coupler, such as a directional coupler, in the transmission lines between the combiner 120 and the antenna 122. In still yet another embodiment, the sync unit obtains timing and phase information through a pair of couplers with one coupler in the transmit chain or transmission line of the existing base station and the other coupler in the transmit chain or transmission line of the overlay base station. In the context of this invention, the transmit chain is some portion of the BTS hardware itself and the transmission line is the feedline from the output of the power amplifier in the BTS to the antenna. In general, the transmitted signal can be obtained from any point where the appropriate information needed to determine timing, phase, loading can be obtained. When using information obtained from the transmit chain of a BTS, it is not necessary to use a single location for all pieces of information. For example, timing signals can be obtained in one part of the BTS and power levels can be obtained from another part of the BTS. However, if other than the antenna is used, it is possible to have errors between the location in which the information is obtained and the signal radiated by the antenna. As a result of these errors, the accuracy of setting timing, setting phase, or determining the load may be degraded. These issues are well known to those skilled in the art who understand the teaching of this invention. As shown in Figure 3, the sync unit 128 is also coupled to the overlay BTS 118. However, in alternative

embodiments, the sync unit 128 could be coupled to the existing base station 114 instead of the overlay base station 118. In general, however, the sync unit 128 facilitates time and phase synchronization of the two systems without requiring an additional input or output to the existing system. The sync unit 128 functions to synchronize the timing and phase of the overlay base station with that of the existing base station.

In order to maintain the orthogonality between the signals transmitted by the existing BTS 114 and the signals transmitted by the overlay BTS 118, the timing of the BTS's 114 and 118 must be aligned with one another as perceived by the remote units within the corresponding coverage area. In the cdma2000 system, only timing must be aligned in order to maintain orthogonality with an IS-95 system. However, other systems may require the signal phase to also be aligned. In addition, in order to use a common pilot channel, the phase must be aligned between the existing system and the overlay system.

For example, when overlaying a cdma2000 system with an IS-95 system, the code channels should be time-aligned within about one sixteenth ($1/16^{\text{th}}$) of a PN chip or approximately 50 nanoseconds. As the time-alignment error increases, the signals transmitted by the existing and the overlay base stations become less orthogonal. Signals which are not orthogonal interfere with each other and result in a lower system capacity.

In one embodiment, the overlay system uses the same pilot channel as the existing system. In this embodiment, the phase of each CDMA code channel transmitted by the overlay BTS 118 must be phase-aligned with the pilot signal transmitted by the existing BTS 114 because the remote uses the pilot signal transmitted from the existing BTS 114 to form a phase reference to demodulate the data signal from the overlay BTS 118.

Figure 4 is a block diagram of the sync unit 128. In one embodiment, the sync unit 128 includes a pilot signal receiver 140. The construction of the pilot signal receiver can be very similar to the construction of a remote unit to implement well-known techniques of receiving a pilot signal in a CDMA

system. In addition, the sync unit 128 includes an overlay channel receiver 142 which serves to receive a channel from the overlay base station. For example, in a cdma2000 system, the overlay channel receiver 142 (which can also be constructed according to well-known techniques) can be used to receive the Forward Common Control Channel (F-CCCH), the Forward Broadcast Control Channel (F-BCCH), or any other signal transmitted by the overlay base station. Preferably, the monitored signal is transmitted continuously. The pilot signal receiver 140 generates a timing and phase signal. The overlay channel receiver 142 also generates a timing and phase signal. In one embodiment, a single signal is generated indicative of both timing and phase. In another embodiment of this invention where phase is not needed, only timing information needs to be obtained.

A phase discriminator 144 compares the phase signal output by the pilot signal receiver 140 to the phase signal output by the overlay channel receiver 142 and generates an error signal indicative of the phase difference between these signals. The construction of the phase discriminator 144 can be according to any number of well-known devices for implementing techniques for determining phase error or phase differences. In alternative embodiments, the sync unit could monitor some other channel transmitted by the existing base station such as the paging channel or sync channel. In yet another alternative embodiment, the overlay BTS 118 transmits the pilot signal which is monitored by the sync unit 128 and the sync unit 128 monitors another channel transmitted by the existing BTS 114.

The phase error signal output by the sync unit 128 is coupled to a phase error input of the overlay BTS 118. The overlay BTS 118 uses the phase error signal to modify the phase of the transmitted signal from the overlay BTS 118 in order to decrease the size of the phase error. This process can be accomplished by many well-known methods depending on the individual design of the overlay BTS 118. For example, the phase error can be used to control a voltage controlled oscillator (VCO) which is used to generate one or more of the local oscillator frequencies for the overlay BTS

118. Alternatively, a phase shifter or delay line can be developed within the analog or digital circuitry which is controlled by the error signal from the sync unit 128. In an alternative embodiment, the output of the sync unit 128 can be coupled to the existing base station 114 and used to adjust the phase thereof. In general, the process aligns the phase of the signals transmitted by the overlay BTS with the signals transmitted by the existing BTS. Because the signals from the existing BTS are aligned with each other, and the signals from the overlay BTS are aligned with each other, this alignment has the effect of phase aligning all of the signals with each other.

10 In much the same manner, the sync unit 128 can be used to align the timing of the overlay BTS 118 with the timing of the existing BTS 114. A time error detection unit 146 within the sync unit 128 generates an error signal reflecting the relative timing of the signal output by the existing base station 114 and the overlay base station 118. In general, the existing base station 114, as well as the overlay base station 128 comprise a timing generator which is configured to be adjusted in order to synchronize the system time to a universal reference. The timing error signal generated by the sync unit 128 can be coupled to the timing generator to adjust the timing between the existing base station 114 and the overlay base station 118 so that the timing error decreases. Because the signals from the existing BTS are aligned with each other, and the signals from the overlay BTS are aligned with each other, this alignment has the effect of time aligning all of the signals with each other.

25 Another important aspect associated with overlaying a second CDMA system over an existing CDMA system is the need to control the loading on each system. The loading is important for determining the admission policies. Admission policies refer to the decisions that the wireless system needs to make on whether to permit additional voice or data calls to be added, permit higher data rates to be used. These admission policies in turn increase or decrease loading. As noted above, in general, the number of active traffic channels is indicative of the loading of the system

but it is not dispositive. Thus, simply counting the number of active traffic channels and passing this information from the existing BTS 114 to the existing BSC 112 and to the MSC 110 and from there to the overlay BSC 116 and finally to the overlay BTS 118 does not provide an accurate estimation of the loading on the system. In addition, such a scheme involves the modification of the exiting system. However, in order to avoid arbitrary admission limits on each system, it would be advantageous to develop a composite measure of loading. The composite measure of loading can be used to influence the admission policies of the overlay BTS 116 and the existing BTS 114 so that the total load on each of the BTS's remains within a reasonable limit.

In one embodiment, the sync unit 128 is also used to provide loading information to the overlay system without requiring modification to the existing system. For example, a power measurement unit 148 is coupled to the antenna 126 and measures the power on each forward link code channel generated by both the existing and overlay systems. In addition, the pilot signal receiver 140 determines the power of the pilot channel. Based upon this information, a compare unit 150 can determine a loading indication α according to Equation 2 below.

$$\alpha = \frac{\left(\frac{E_p}{I_c} \right)_{\text{maximum}}}{\left(\frac{E_p}{I_c} \right)_{\text{current}}} \quad \text{Eq. 2}$$

wherein:

α is a loading indication which remains less than one to indicate stable system behavior;

E_p is the energy of the pilot signal;

I_c is the total energy of the forward link code channels including the pilot channel;

$\left(\frac{E_p}{I_c}\right)_{\text{maximum}}$ is the predetermined pilot channel fraction which ensures

stable behavior of the system; and

$\left(\frac{E_p}{I_c}\right)_{\text{current}}$ is equal to the current pilot channel fraction.

5 In one embodiment the compare unit 150 calculates a load indication according to Equation 2 and provides this information to the overlay BTS 118 which uses this value in an admission algorithm. In one embodiment, the existing BTS 114 continues to use a predetermined admission algorithm in the same manner as prior to introduction of the overlay BTS 118.

10 Referring again to Figure 4, note that the power measurement unit 148 measures the power on each forward link code channel for each channel of the existing system as well as each channel of the new overlay system. Therefore, with reference to Figure 2, in one embodiment, the power measurement unit 148 measures the power on each forward link code channel for each of the channels shown.

15 The pilot signal receiver 140, the overlay channel receiver 142 and the power measurement unit 148 each perform the demodulation of signals. Therefore, in one embodiment, these blocks may be efficiently implemented in a single time-shared unit. In another embodiment, at least a portion of the receiver hardware is shared among these units.

20 In the embodiments just described, a single pilot signal is transmitted by either the existing system or the overlay system. The common pilot signal is used by remote units operating in both systems in order to determine a phase reference which is used to demodulate the traffic channel signals. In an alternative embodiment, the principles of auxiliary pilot channel operation can be applied to either the existing system or the overlay system. The auxiliary pilot provides a phase reference which is used by the remote unit in demodulating signals from the overlaid base station.

Figure 5 is a block diagram of a system in which the overlay system utilizes an auxiliary pilot channel. In Figure 5, the overlay BSC 116 is coupled to an overlay BTS 160. The overlay BTS 160 is coupled to a directional, spot antenna 162. The directional, spot antenna 162 provides an area of coverage within the coverage area of the existing system. For example, Figure 6 is a representative drawing showing the use of a directional, spot antenna. The larger region 170 represents the coverage area of the antenna 122 and the smaller coverage area 172 represents the coverage area of the directional, spot antenna 162. In an actual system, a directional, spot antenna may be used to provide a coverage area primarily including a particularly high-loading region. For example, a directional, spot antenna may be used to provide coverage area to a football stadium, shopping mall or university campus. In one embodiment, the spot antenna 162 can have the same coverage as the antenna 122. Furthermore, it is not necessary to have a separate antenna to use the auxiliary pilot channel. In this case, the auxiliary pilot channel can be used to provide the phase reference for the signals transmitted by the overlaid base station in the manner illustrated by Figure 3. In this embodiment, sync unit 164 provides for timing of existing base station 114 relative to overlaid base station 118 or 162.

In this embodiment, the overlay BTS 160 transmits an independent pilot which is orthogonal to the pilot signal transmitted by the existing BTS 114. In the embodiment in which the overlaid BTS has a smaller coverage area than the existing BTS, as a remote unit drives from within the coverage area 170 into the coverage area 172, the remote unit performs a handoff from the existing system to the overlay system, according to well-known techniques. Within the coverage area 172, the remote unit uses the pilot signal transmitted by the overlay BTS 160 as a phase reference. For this reason, it is no longer necessary for the signals transmitted from the overlay base station 160 to be in phase synchronization with the signals transmitted from the existing BTS 114 as perceived by the remote unit.

Although in the case of a cdma2000 system overlaying an IS-95 system when the auxiliary pilot is used by the overlay system, phase synchronization is not required between an existing system and an overlay system, time synchronization is still important to provide orthogonality of the signals. Therefore, in Figure 5, the sync unit 164 and antenna 166 need only provide time synchronization information to the overlay base station 160.

In some embodiments, the pilot signal used by the overlay system 160 uses a longer Walsh sequence than the existing BTS. For example, in one embodiment, the pilot signal transmitted by the existing BTS 114 is 64 chips in length while the Walsh symbol used to transmit the pilot from overlay BTS 160 is 512 chips in length. The use of a more lengthy Walsh sequence allows for the generation of many more orthogonal pilot signals, thus, allowing auxiliary pilot channels to be assigned more often within a system. Additional information concerning auxiliary pilot channels can be found in U.S. Patent Application entitled "Method and Apparatus for Providing Orthogonal Spot Beams, Sectors and Picocells" filed September 8, 1997, Serial No. 08/925,521 (the '521 application) which is assigned to the assignee hereof and incorporated herein in its entirety by reference. The '521 application describes a method and apparatus for providing additional pilot channels that has minimum impact on the number of available Walsh channels. The '521 application describes a method of concatenating combinations of a Walsh sequence and the complement of the Walsh sequence to provide an auxiliary pilot reference sequence.

Figure 7 is a flowchart illustrating phase synchronization according to the invention. The teaching of Figure 7 can be applied directly to time synchronization. In block 200, the existing BTS 114 transmits a pilot signal using the first CDMA channelization over the antenna 122. In block 202, the sync unit 128 receives the pilot signal over the antenna 126. In block 204, the overlay BTS 118 transmits an information signal using the second CDMA channelization and transmits it over the antenna 122. The information signal

can be a traffic channel or other remote unit specific signal or it can be a broadcast signal such as a sync channel or paging channel transmission. In block 206, the sync unit 128 receives the information signal over the antenna 126. In block 208, the sync channel 128 compares the phase of the pilot signal to the phase of the information signal and generates a phase error indication. In block 210, the overlay BTS 118 adjusts the phase at which the information signal is transmitted in response to the phase error signal.

In the case of timing synchronization, block 208 can be replaced with a block which compares the timing of the pilot signal to the timing of the information signal to generate a timing error signal. Likewise, block 210 can be replaced with a block which adjusts the timing at which the information signal is transmitted.

Figure 8 is a flowchart showing one embodiment of a load control mechanism according to the invention. In block 220, the existing base station 114 transmits a pilot signal and one or more information signals over the antenna 122 using the first CDMA channelization. In block 222, the sync unit 128 receives the pilot signal over the antenna 126 and determines a power level of the pilot signal. In block 224, the overlay base station 118 transmits one or more information signals using the second CDMA channelization over antenna 122. In block 226, the sync unit 128 receives the information signals transmitted using the first and second CDMA channelization over the antenna 126 and determines a power level of each of the information signals. In block 228, the sync unit 128 determines a level of loading based upon the power measurements. In an alternative embodiment, the determination of loading may be calculated within the overlay BTS 118 or at some other location. In block 130, the level of loading is used to determine an admission criteria for the admission of additional signals transmitted from overlay BTS 118 using the second CDMA channelization.

With respect to Figures 7 and 8 and the alternate embodiments discussed above, the process of obtaining signal energy via a second antenna

may be executed using a directional coupler or other signal energy coupling mechanism as noted above.

The invention may be embodied in other specific forms without departing from its spirit or essential characteristics. For example, in one
5 embodiment, the overlay system is a system having a more narrow channel bandwidth while the existing system has a more broad band channel. In one embodiment, more than two systems are overlaid upon one another. The described embodiment is to be considered in all respects only as illustrative and not as restrictive and the scope of the claim of the invention is, therefore,
10 indicated by the appended claims rather than by the foregoing descriptions. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed is:

CLAIMS

1. A method of overlaying a second CDMA system over a first
2 CDMA system comprising the steps of:
transmitting a first signal using a first CDMA channelization;
4 transmitting a second signal using a second CDMA
channelization, wherein said first and second CDMA channelization
6 share at least a portion of a common frequency spectrum and wherein
said first signal and said second signal are transmitted into a common
8 coverage area;
obtaining signal energy corresponding to said first signal;
10 obtaining signal energy corresponding to said second signal;
comparing a phase of said first signal to a phase of said second
12 signal to generate a phase error indication based upon said obtained
signal energies; and
14 adjusting a phase at which said second signal is transmitted in
response to said phase error indication.
2. The method of Claim 1, wherein said first signal is a pilot signal.
3. The method of Claim 1, wherein steps of transmitting said first
2 and second signals comprise the step of transmitting said first and second
signals over a first antenna.
4. The method of Claim 3, wherein steps of obtaining signal energy
2 corresponding to said first and second signals comprise the step of receiving
said first and second signals over a second antenna.
5. The method of Claim 1, wherein step of obtaining signal energy
2 corresponding to said second signal comprises the step of using a coupler.

2 6. The method of Claim 1, wherein said second CDMA channelization has a wider spectrum than said first CDMA channelization.

2 7. The method of Claim 1, wherein said first CDMA channelization has a wider spectrum than said second CDMA channelization.

2 8. The method of Claim 1, wherein said second signal is a remote unit specific signal.

2 9. The method of Claim 1, wherein said second signal is an information signal.

2 10. The method of Claim 1, wherein said second signal is a broadcast signal.

2 11. A method of overlaying a second CDMA system over a first CDMA system comprising the steps of:

4 transmitting a first signal using a first CDMA channelization;
 transmitting a second signal using a second CDMA channelization, wherein said first and second CDMA channelization share at least a portion of a common frequency spectrum and wherein said first signal and said second signal are transmitted into a common coverage area;

8 obtaining signal energy corresponding to said first signal;
10 obtaining signal energy corresponding to said second signal;
 comparing a timing of said first signal to a timing of said
12 second signal to generate a timing error indication based upon said obtained signal energies; and

14 adjusting a timing at which said second signal is transmitted in response to said timing error indication.

 12. The method of Claim 11, wherein said first signal is a pilot signal.

13. The method of Claim 11, wherein steps of transmitting said first
2 and second signals comprise the step of transmitting said first and second
signals over a first antenna.

14. The method of Claim 13 wherein steps of obtaining signal energy
2 corresponding to said first and second signals comprise the step of receiving
said first and second signals over a second antenna.

15. The method of Claim 11, wherein step of obtaining signal energy
2 corresponding to said second signal comprises the step of using a coupler.

16. The method of Claim 11 wherein said second CDMA
2 channelization has a wider spectrum than said first CDMA channelization.

17. The method of Claim 11 wherein said first CDMA channelization
2 has a wider spectrum than said second CDMA channelization.

18. The method of Claim 11 wherein said second signal is a remote
2 unit specific signal.

19. The method of Claim 11 wherein said second signal is an
2 information signal.

20. The method of Claim 11, wherein said second signal is a broadcast
2 signal.

21. A method of overlaying a second CDMA system over a first
2 CDMA system comprising the steps of:

4 receiving a first signal and one or more first information
signals, said first information signals using a first CDMA
channelization and providing service to a first coverage area;

6 receiving one or more second information signals, said second
information signals using a second CDMA channelization and
8 providing service to at least a portion of said first coverage area;
determining a power level of said first signal;
10 determining a power level of each of said one or more first
information signals;
12 determining a power level of each of said one or more second
information signals; and
14 determining a level of loading within said at least said portion
of said first coverage area based upon said power level of said first
16 signal and said power levels of said one or more first and second
information signals.

22. The method of Claim 21, further comprising the step of
2 transmitting said one or more first information signal and said one or more
second information over a first antenna.

23. The method of Claim 22, wherein steps of receiving comprise the
2 step of receiving signal energy over a second antenna.

24. The method of Claim 21 wherein steps of receiving comprise the
2 step of using a coupler.

25. The method of Claim 21 further comprising using said level of
2 loading to determine an admission criteria for admission of information
signals transmitted using said second CDMA channelization.

26. The method of Claim 21 wherein said second CDMA
2 channelization has a wider spectrum than said first CDMA channelization.

27. The method of Claim 21, wherein said first CDMA channelization
2 has a wider spectrum than said second CDMA channelization.

28. The method of Claim 21 wherein said first signal is a pilot signal.

29. A CDMA system comprising:
2 a first base station configured to transmit a first signal;
a second base station configured to transmit a second signal;
4 and
a sync unit configured to receive said first signal and said
6 second signal and configured to determine a relative phase difference
therebetween;
8 wherein said second base station is further configured to adjust
a phase at which said second signal is transmitted based upon said
10 relative phase difference.

30. The CDMA system of Claim 29, further comprising a first antenna
2 coupled to said first and second base stations and configured to emit said
first signal and said second signal.

31. The CDMA system of Claim 29 wherein said first signal is a pilot
2 signal and said second signal is an information signal.

32. The CDMA system of Claim 29 wherein said first signal is
2 transmitted using a first CDMA channelization and said second signal is
transmitted using a second CDMA channelization.

33. A CDMA system comprising:
2 a first base station configured to transmit a first signal;
a second base station configured to transmit a second signal;
4 and

6 a sync unit configured to receive said first signal and said
second signal and configured to determine a relative timing
difference therebetween;

8 wherein said second base station is further configured to adjust
a timing at which said second signal is transmitted based upon said
10 relative timing difference.

34. A CDMA system comprising:

2 a first base station configured to transmit a first signal and one
or more first information signals, said first information signals
4 providing service to a first coverage area;

a second base station configured to transmit one or more
6 second information signals having a second CDMA channelization,
said second information signals providing service to at least a portion
8 of said first coverage area; and

a sync unit configured to obtain a power level corresponding
10 to each of said first signal and said one or more first and second
information signals;

12 wherein said second sync unit is further configured determine
a level of loading within said at least said portion of said first
14 coverage area based upon said power measurement of said first
signal and said power measurements of said one or more first and
16 second information signals.

35. The CDMA system of Claim 34, wherein said second base station
2 is further configured to determine an admission criteria for admission of
information signals transmitted using said second CDMA channelization.

36. A sync unit comprising:

2 a first receiver configured to receive a first signal having a first
CDMA channelization and to produce an indication of a timing of
4 said first signal;

6 a second receiver configured to receive a second signal having
a second CDMA channelization and to produce an indication of a
timing of said second signal; and

8 a time error detection unit configured to compare said timing
of said first signal and said timing of said second signal to determine
10 a relative timing offset indication to be used to adjust a transmission
timing of said second signal.

37. The sync unit of Claim 36 wherein said sync unit further
2 comprises an antenna through which said first and second signal are
received.

38. The sync unit of Claim 36 wherein said sync unit further
2 comprises a coupler through which said first and second signal are received.

39. The sync unit of Claim 36, wherein said first and second receivers
2 share at least a portion of hardware.

40. The sync unit of Claim 36 wherein said first and second receivers
2 are a single time-shared unit.

41. The sync unit of Claim 36, further comprising a phase error
2 detection unit configured to compare a phase of said first signal and a phase
of said second signal to determine a relative phase offset indication to be
4 used to adjust a transmission phase of said second signal.

42. The sync unit of Claim 36 further comprising a power
2 measurement unit configured to determine a power level of said first and

second signal and a compare unit configured to determine a level of loading
4 within a coverage area corresponding to said first and second signals.

43. A sync unit comprising:

- 2 a first receiver configured to receive a first signal and one or
more first information signals having a first CDMA channelization,
4 said first information signals providing service to a first coverage
area;
- 6 a second receiver configured to receive one or more second
information signals having a second CDMA channelization, said
8 second information signals providing service to at least a portion of
said first coverage area;
- 10 a power measurement unit configured to determine a power
level of said first signal, a power level of each of said one or more first
12 information signals, and a power level of each of said one or more
second information signals; and
- 14 a compare unit configured to determine a level of loading
within said at least said portion of said first coverage area based upon
16 said power level of said first signal and said power level of said one
or more first and second information signals.

1/8

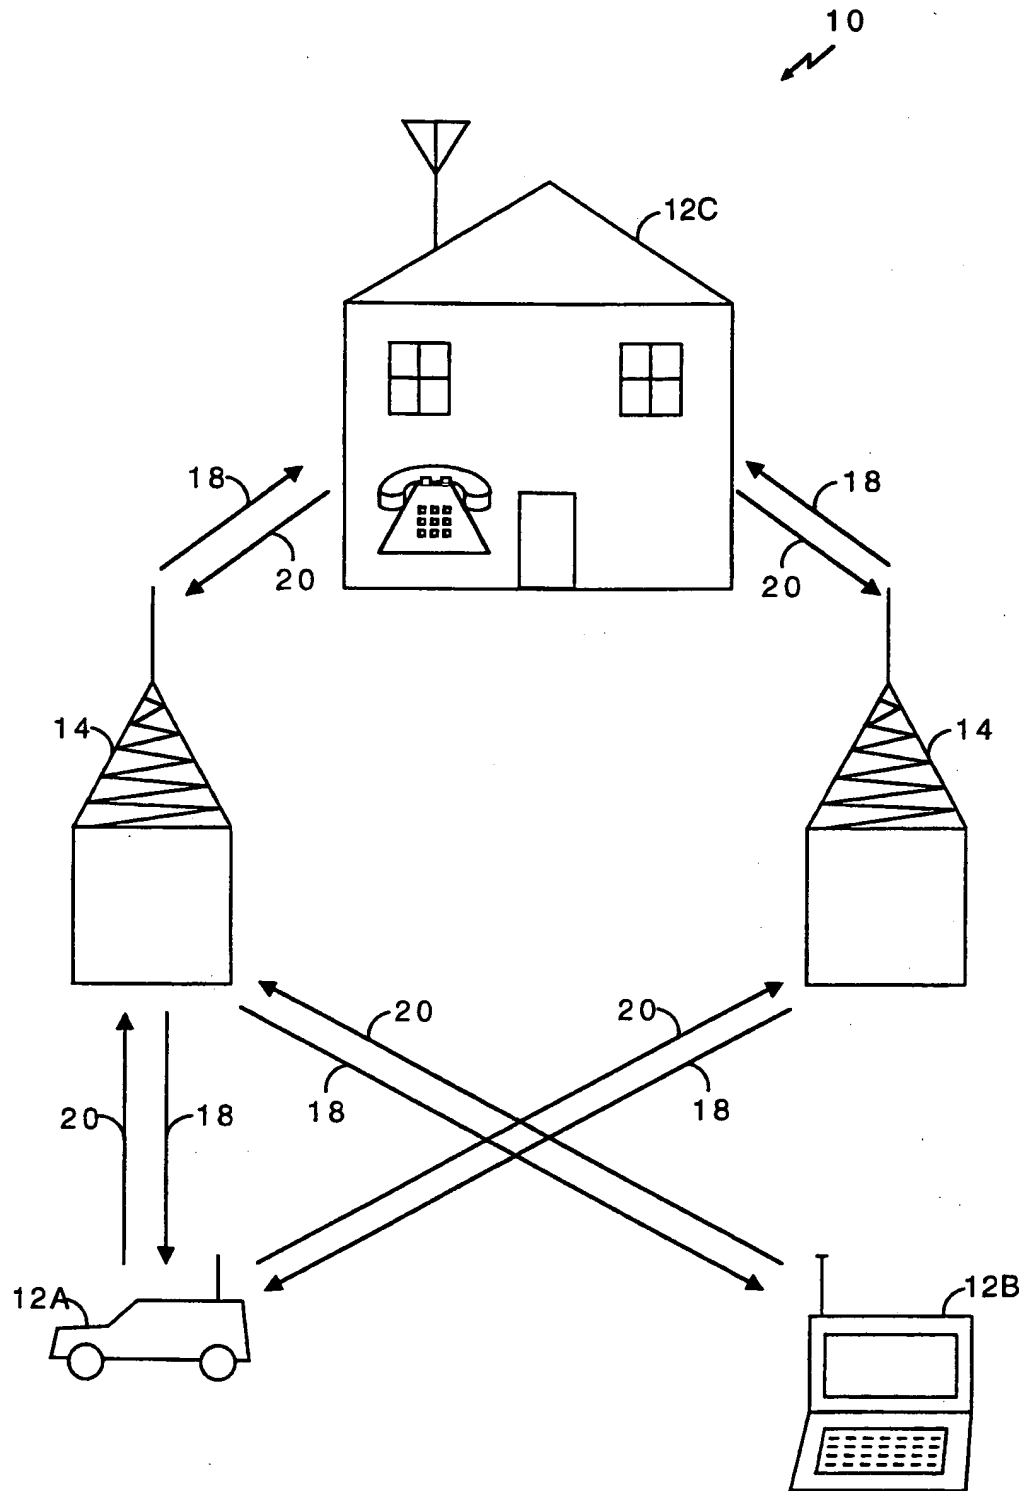


FIG. 1

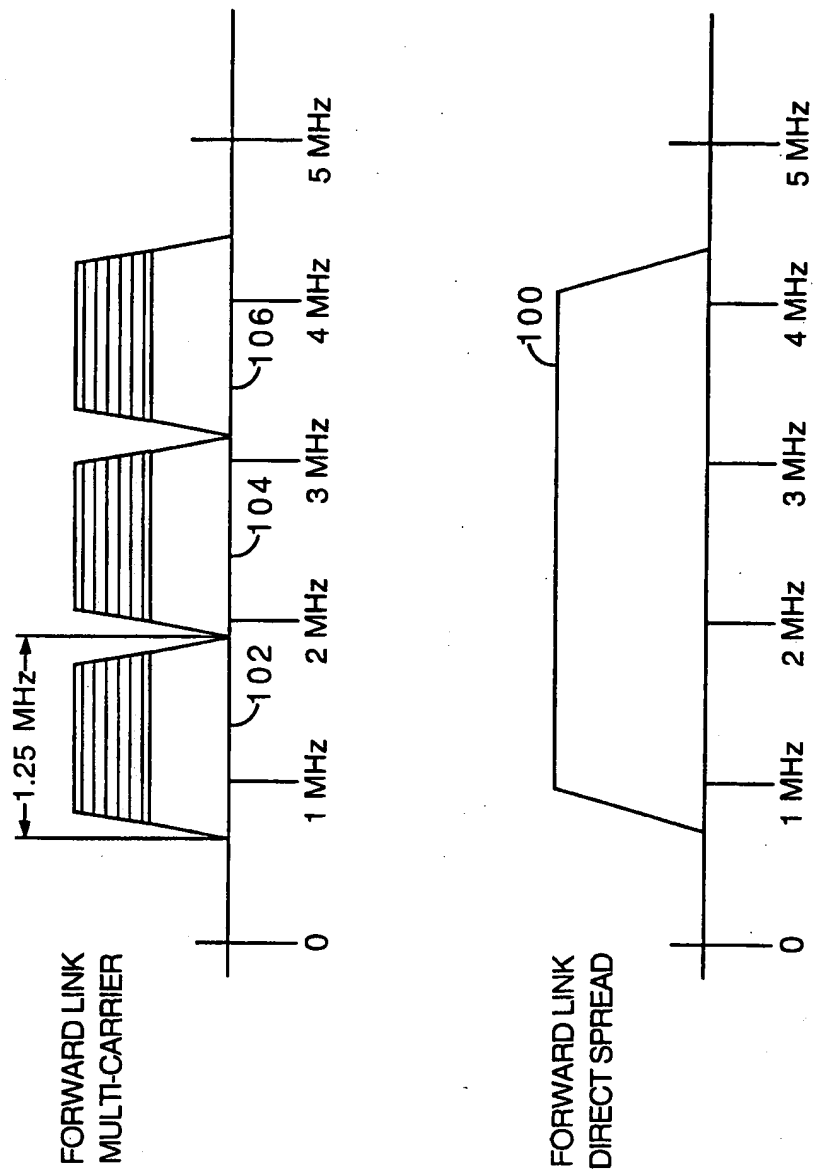


FIG. 2

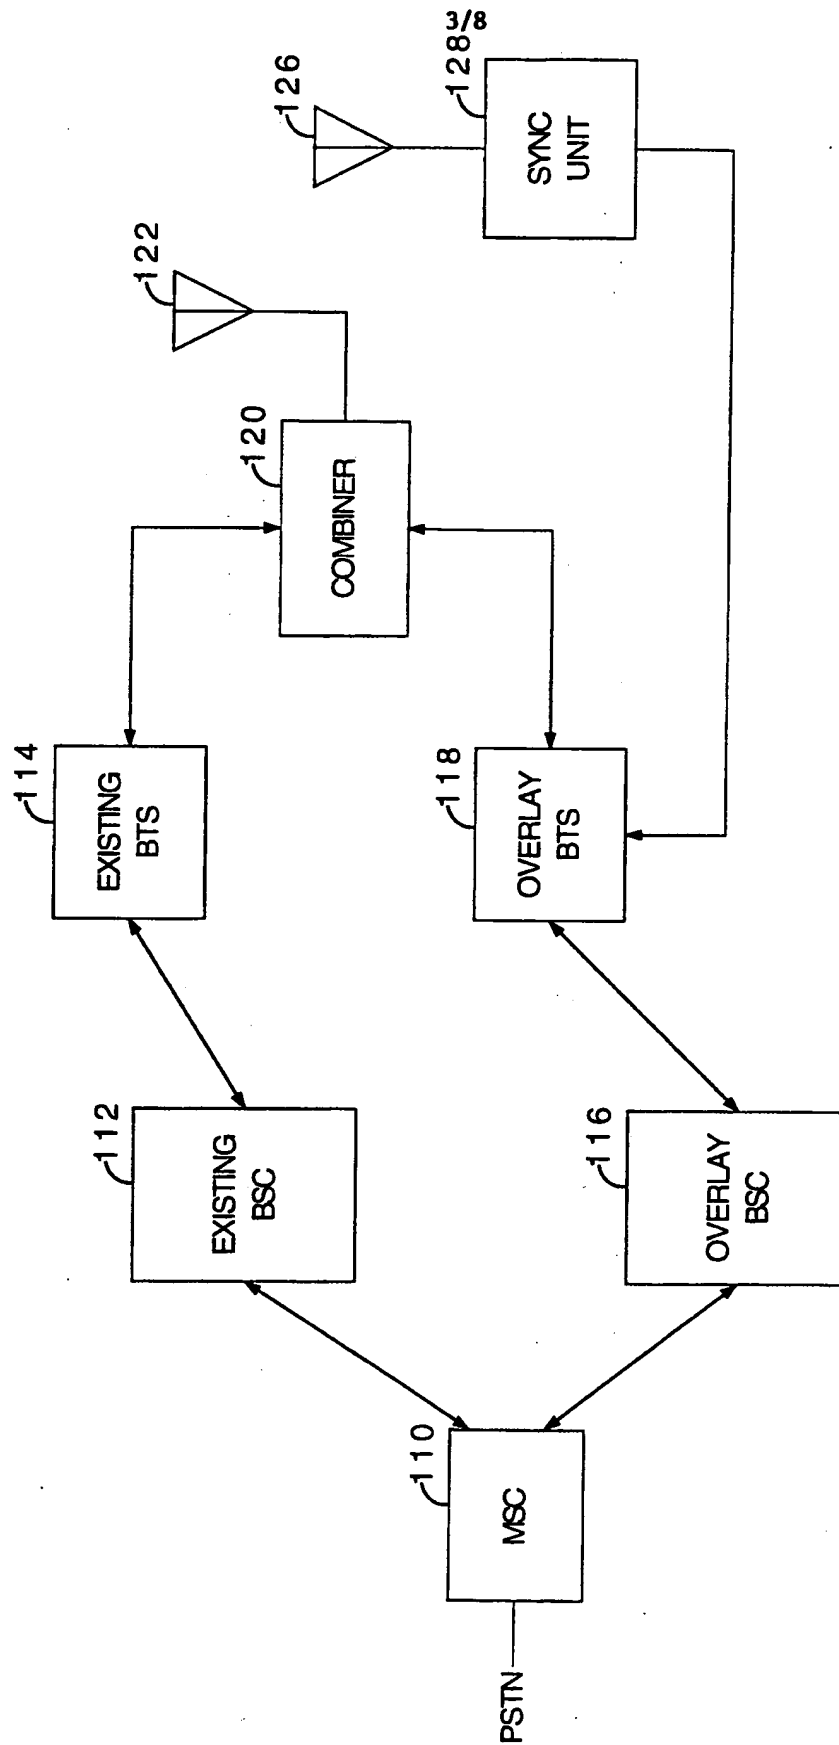


FIG. 3

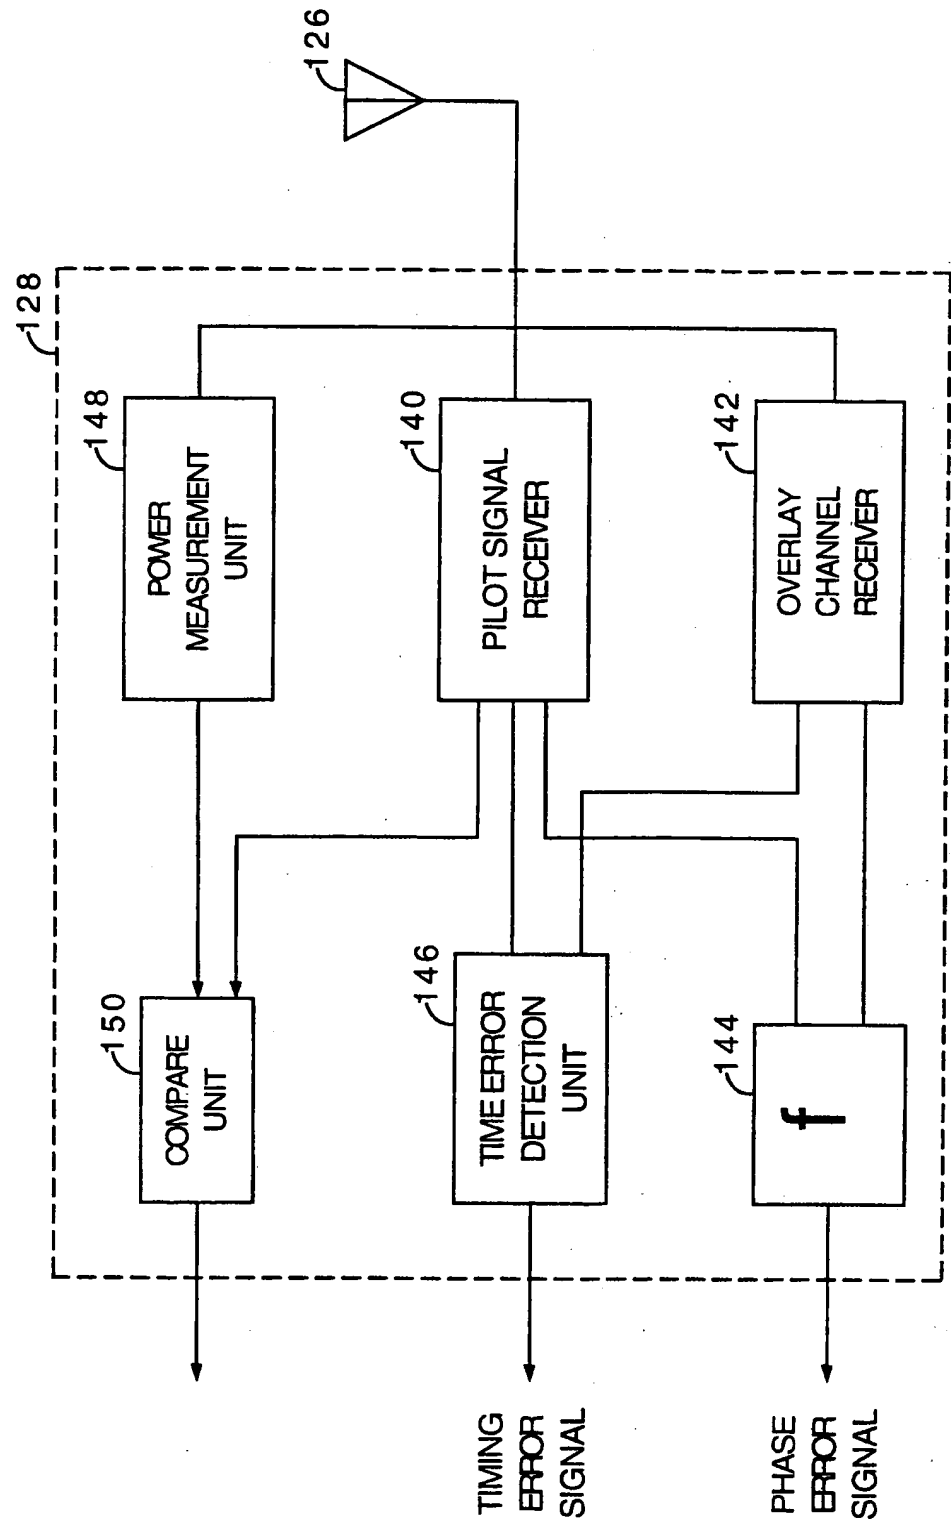


FIG. 4

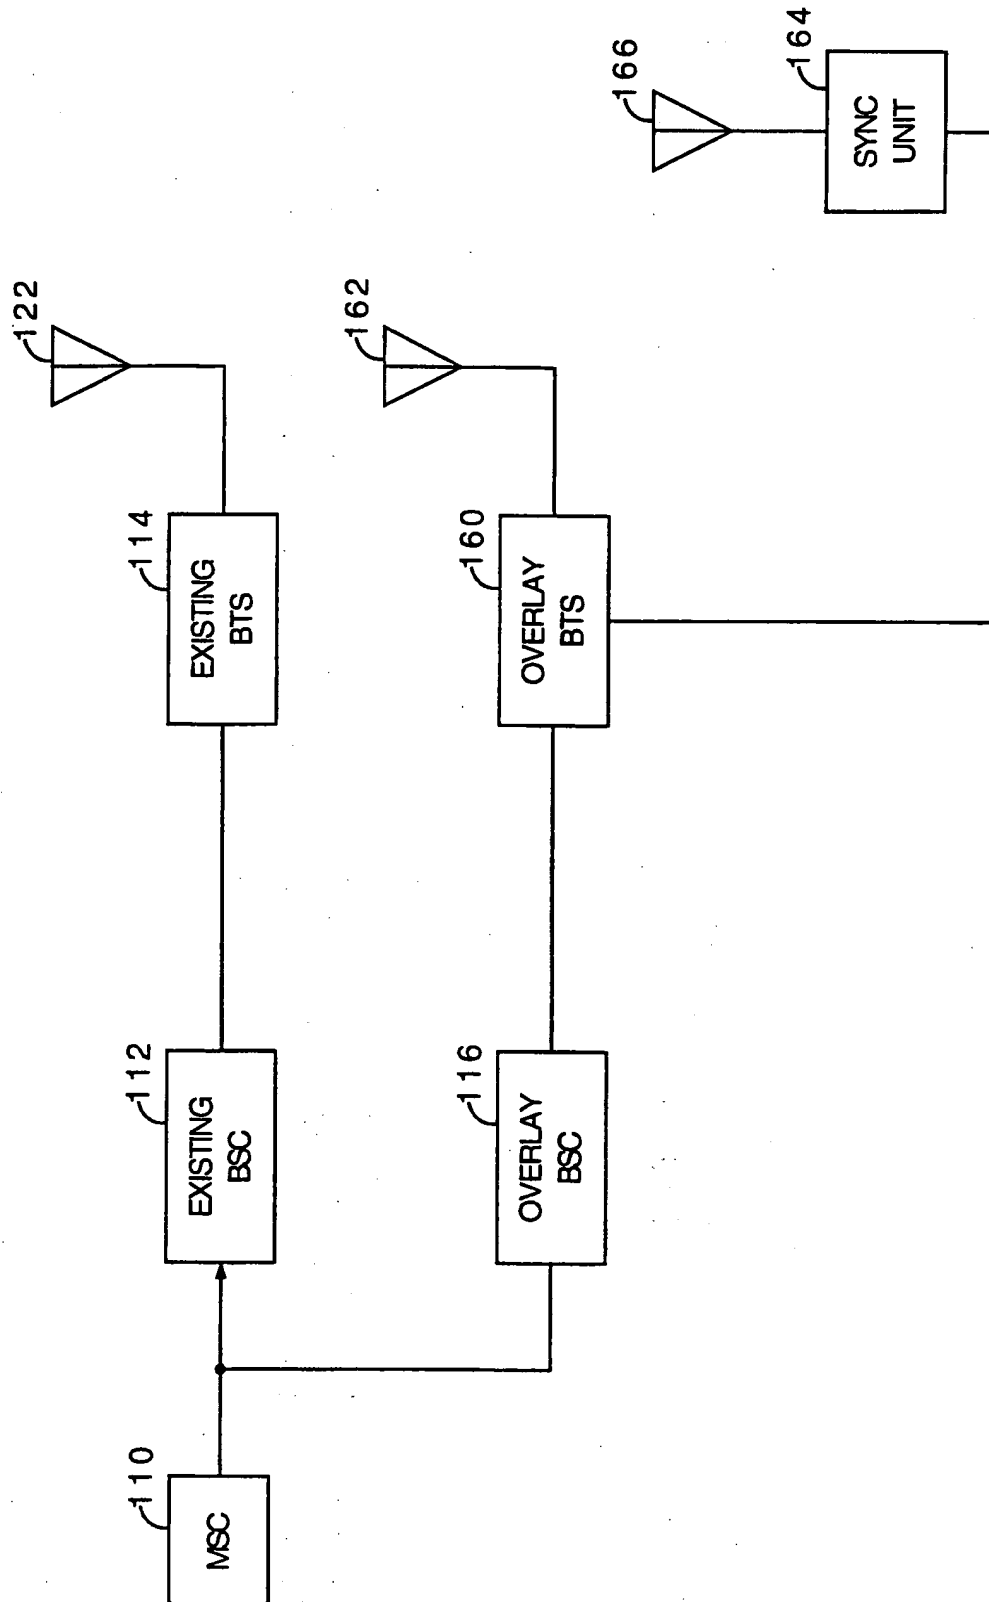


FIG. 5

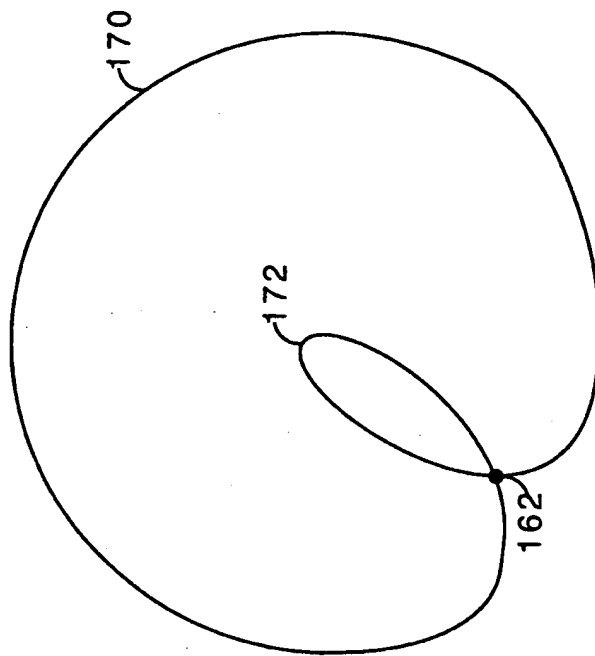


FIG. 6

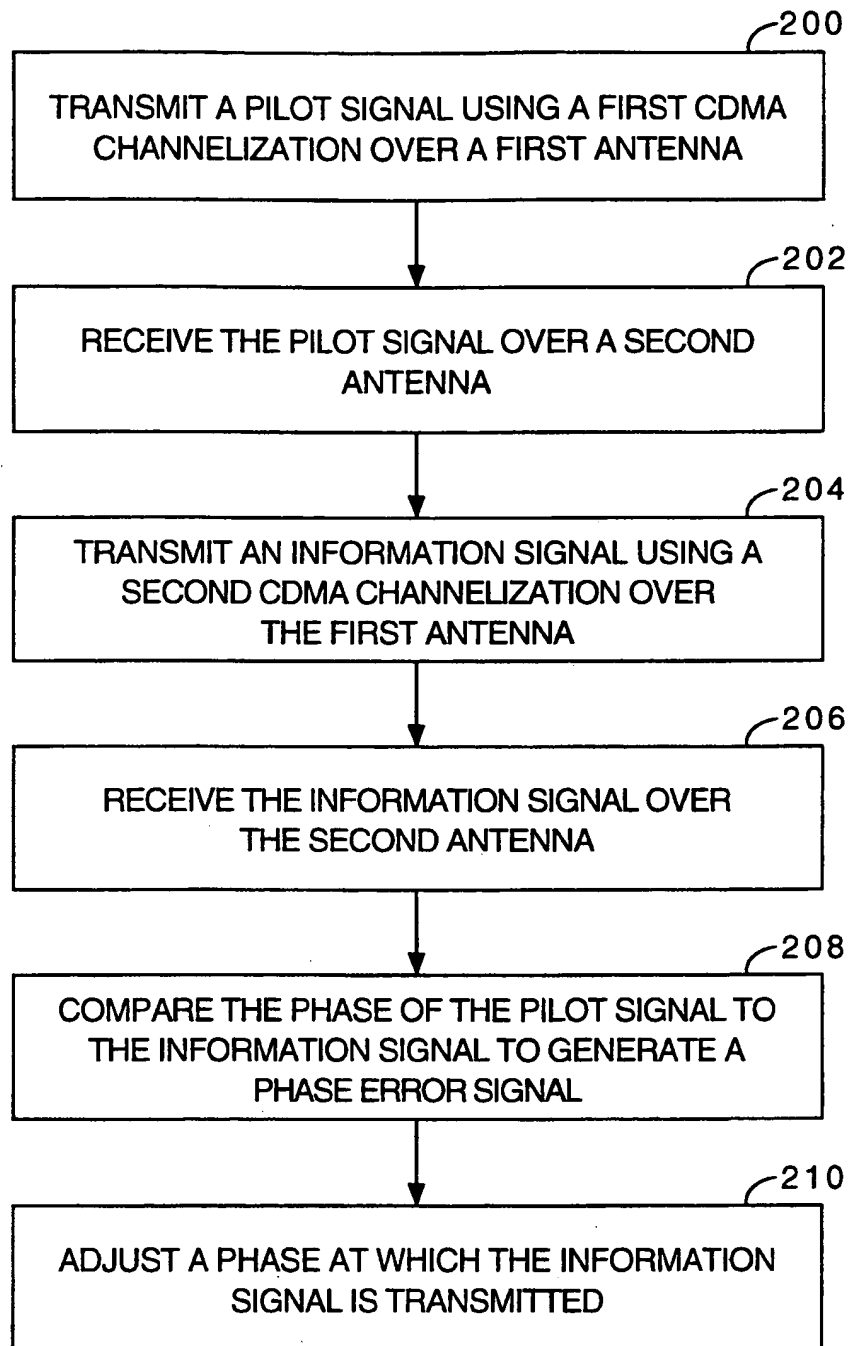


FIG. 7

8/8

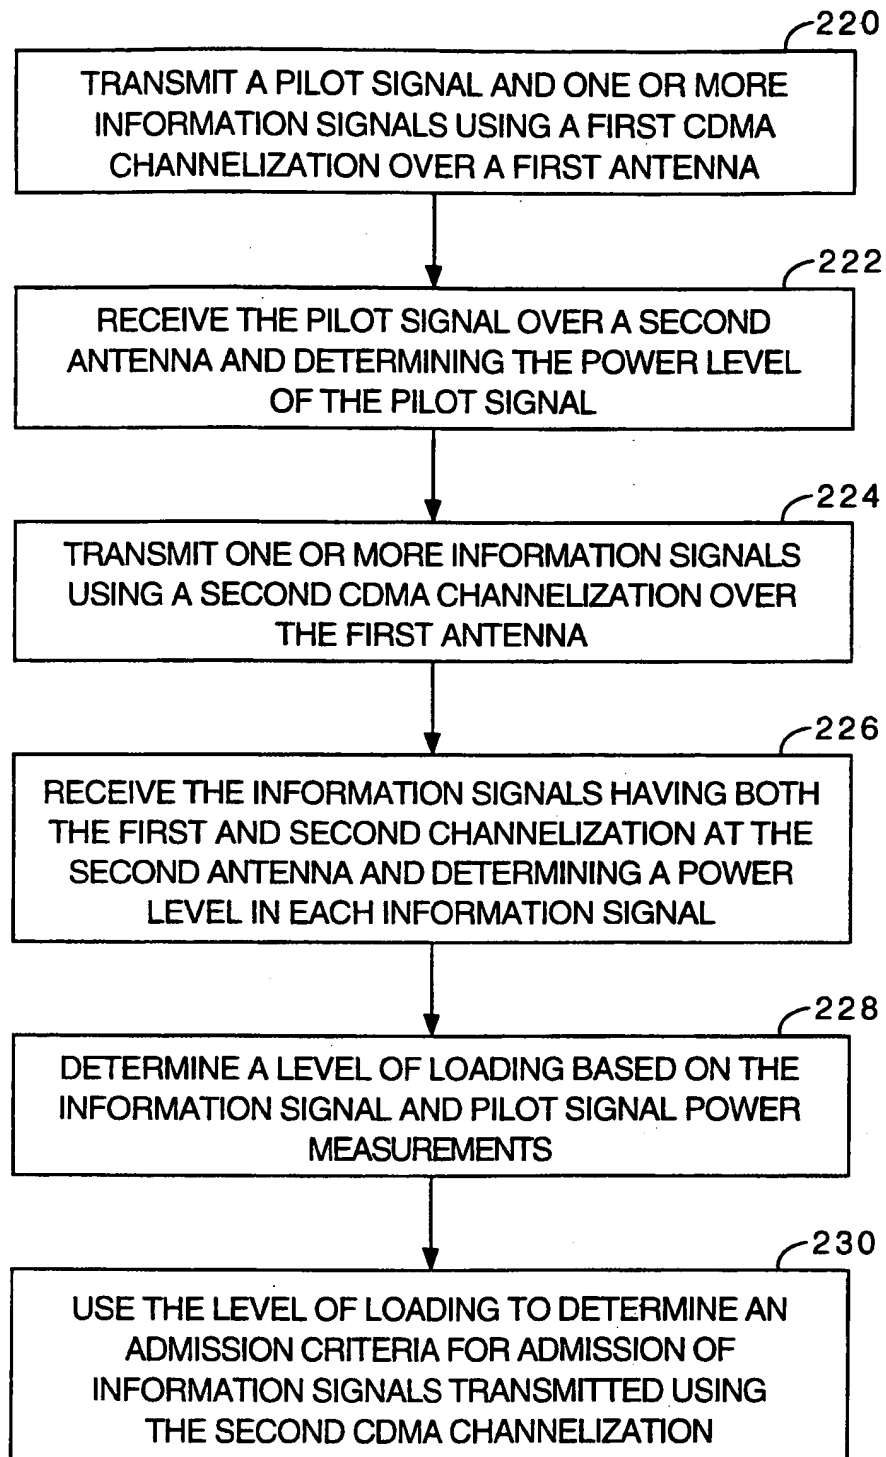


FIG. 8

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/24956

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04B7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 828 659 A (LARSSON LARS GUSTAV ET AL) 27 October 1998 (1998-10-27) column 3, line 30 - line 36 column 4, line 18 - line 33 claims 1,4,10,11	1,3,4, 11,29, 33,36
A	US 5 608 765 A (TANOUE KATSUMI) 4 March 1997 (1997-03-04) abstract; figure 1 column 2, line 51 -column 3, line 4; claims 1-3	1,3,4, 11,29, 33,36



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

20 December 2000

Date of mailing of the international search report

28/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Amadei, D

INTERNATIONAL SEARCH REPORT

Inter. onal Application No

PCT/US 00/24956

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 224 120 A (SCHILLING DONALD L) 29 June 1993 (1993-06-29) abstract; claim 17 column 2, line 36 - line 39 column 5, line 42 - line 68 column 17, line 6 - line 22 -----</p>	<p>21-25, 34, 35, 43</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/24956

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5828659	A	27-10-1998	AU 677079 B	10-04-1997
			AU 7012994 A	03-01-1995
			BR 9405406 A	08-09-1999
			CA 2141445 A	22-12-1994
			CN 1112385 A	22-11-1995
			EP 0659326 A	28-06-1995
			FI 950626 A	14-02-1995
			JP 8500474 T	16-01-1996
			NZ 267747 A	27-07-1997
			WO 9430024 A	22-12-1994
US 5608765	A	04-03-1997	JP 8023568 A	23-01-1996
			SE 9502464 A	09-01-1996
US 5224120	A	29-06-1993	US 5351269 A	27-09-1994
			US 5367533 A	22-11-1994
			DE 69132287 D	10-08-2000
			DE 514539 T	09-12-1999
			EP 0514539 A	25-11-1992
			EP 0987913 A	22-03-2000
			EP 0991209 A	05-04-2000
			ES 2137902 T	01-01-2000
			SG 43893 A	14-11-1997
			WO 9210891 A	25-06-1992
			US 5469468 A	21-11-1995
			US 5365544 A	15-11-1994
			US 5588020 A	24-12-1996
			US 5506864 A	09-04-1996
			US 5703874 A	30-12-1997
			US 5663956 A	02-09-1997
			US 5263045 A	16-11-1993
			US 5974039 A	26-10-1999
			US 6011789 A	04-01-2000